



CBS10J/CBS15J/CBS20J
半电动托盘堆垛车 Semi-electric pallet stacker

产品性能特点:

1. 液压力单元主要元器件选用国际知名品牌, 结构紧凑, 反应灵敏.
2. 进口马达继电器, 动作快、吸合能力强、使用寿命长;
3. 优质液压油缸和油路系统, 工作稳定可靠;
4. 统一牌蓄电池;
5. 外置式充电器, 散热性能更佳, 避免内置充电器在车辆运行时因震动带来的损坏;
6. 充电器与蓄电池连接采用航空插头, 操作方便、安全耐用;
7. 紧急断电开关, 当车辆处于危险状态时, 按下紧急断电开关就能切断电源.

Characteristics:



1. The hydraulic power unit has a compact structure, sensitive response and its main parts of the system generally come from well-known global suppliers.
2. The imported motor relay has quick response, excellent contact performance, and long life expectancy.
3. High quality hydraulic oil cylinder and circuit system ensures stable and reliable operation.
4. TONGYI battery.
5. External positioned charger has better cooling performance and avoids the damage caused by the vibration when operating the truck with internal positioned one.
6. Aviation plug, which is used to connect charger and battery, is easy to operate, safe and durable.
7. Emergency power-off button cuts off the power in case of emergency.



CBS10J/CBS15J/CBS20J
半电动托盘堆垛车 Semi-electric pallet stacker

制造商和技术参数 Manufacturer's Data and Design Characteristics

特征 Characteristics		合力(HELI)																	
1.01 品牌 Manufacturer		CBS10J				CBS15J				CBS20J									
1.02 车型 Model		手动 Handle																	
1.03 操作方式 Operation		手动 Handle																	
1.04 额定载荷能力 Rated traction weight		Q (kg)				1000				1500				2000					
1.05 门架类型 Mast type		单门架 Single mast		两级标准 2-Stage STD				单门架 Single mast		两级标准 2-Stage STD				单门架 Single mast		两级标准 2-Stage STD			
1.06 提升高度 Lift		h3 (mm)		1600	2000	2500	3000	3500	1600	2000	2500	3000	3500	1600	2000				
1.07 最高点载重量 Capacity at highest height		kg		1000	800	700	600	500	1500	1200	1050	900	750	2000	1600				
1.08 自重 (含电瓶) Service weight with battery		kg		315	365	374	380	405	320	374	385	395	415	325	380				
1.09 载荷中心距 Load centre		c (mm)		450															
1.10 前悬距 Axle centre to fork face		x (mm)		705		700				705		700				705		700	
1.11 轴距 Wheel base		y (mm)		1195															
2.01 轮胎类型 Wheels type		尼龙/聚氨酯 Nylon/Polyurethane																	
2.02 驱动轮尺寸 Driving wheel size		Φ × w (mm)		Φ 180 × 50															
2.03 承载轮尺寸 Bearing wheel size		Φ × w (mm)		Φ 74 × 70															
2.04 平衡轮尺寸 Additional wheels (dimensions)		Φ × w (mm)		Φ 180 × 50															
2.05 驱动轮, 平衡轮/承载轮数量 (x=驱动轮) Wheels, number front/rear (x= driven)				1, 1/2															
3.01 最低门架高度 Height of mast, lowered		h1 (mm)		2077	1577	1827	2077	2327	2077	1577	1827	2077	2327	2077	1577				
3.02 门架最大高度 Height of mast, extended		h4 (mm)		2077	2567	3067	3567	4067	2077	2567	3067	3567	4067	2077	2567				
3.03 货叉最低高度 Fork Height, Lowered		h13 (mm)		85															
3.04 整车长度 Overall length		l1 (mm)		1600 (900货叉) / 1800 (1100货叉)															
3.05 车体长度 Length to fork face		l2 (mm)		700															
3.06 整车宽度 Overall width		b1 (mm)		760															
3.07 货叉尺寸 Fork dimensions		e/l (mm)		150/900 (1100)															
3.08 货叉外宽 Width of forks		b5 (mm)		550/640				640				550/640				640			
3.09 轴距中心处离地间隙 Min. Ground clearance		m2 (mm)		32															
3.10 通道宽度: 1000x1200托盘 (1200跨货叉放置) Aisle width with pallet 1000 x 1200 across forks		Ast (mm)		2250															
3.11 通道宽度: 800x1200托盘 (1200沿货叉放置) Aisle width with pallet 800 x 1200 along forks		Ast (mm)		2240															
3.12 转弯半径 Min. Turning radius		Wa (mm)		1350															
4.01 提升速度 满载/空载 Lifting speed, with/without load		(mm/s)		78/145				76/143				78/145				76/143			
4.02 下降速度 满载/空载 Lowering speed, with/without load		(mm/s)		123/107				104/93				127/111				108/97			
4.03 制动类型 Service brake				机械 Machinery															
5.01 起升电机功率 Lift motor rating at S3 15%		(kW)		1.5															
5.02 蓄电池, 根据DIN 43531/35/36 A,B,C,no Battery according to DIN 43531/35/36 A,B,C,no				no															
5.03 蓄电池电压/容量 Battery voltage/rated capacity		(V/Ah)		12/120															
5.04 蓄电池重量 (±5%) Battery weight (± 5%)		(kg)		36															
6.01 噪音水平 Noise level at operator 's ear		(dB(A))		67															

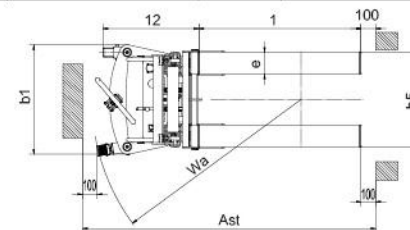

HELI 安徽合力股份有限公司
ANHUI HELI CO., LTD.

地址: 中国合肥经开区方兴大道668号
电话: (86 551)63632133, 63648005, 63689000
传真: (86 551)63633431
服务: 4001-600761
网址: http://www.helichina.com

ADD: NO.668 Fangxing Street, Economical Development Zone, Hefei, P.R.China
TEL: (86 551)63632133, 63648005, 63689000
FAX: (86 551)63633431
400 SERVICE: 4001-600761
WEBSITE: http://www.helichina.com

授权经销商 AUTHORIZED DEALER

* 本公司保留更改产品设计和规格的权利, 恕不另行通知。
* Our products are subject to improvements and changes without notice.