

# CDD06-970

## 0.6 Ton Electric Stacker

Lifting Height: 1400-3300mm

### Load Curve



### Advantages

#### Configuration and Performance

- Short wheelbase and more flexible.
- Electronic power steering system, light and low noise.
- Two-way magnetic valve, three drop speed mode.
- AC Driving system, No carbon brush, Free maintenance.
- USA CURTIS driving controller.
- Electromagnetic, regenerative braking system.
- Automatic lifting limit, proximity switch, long life.

#### Safety

- Curve automatic deceleration devices, more safe.
- Vehicle decelerates automatically at higher position.
- Stepless speed control system, safe and quiet.
- Controller with Multiple automatic protection.
- Emergency reversing device/Emergency brake switch.

**AC | EPS**

**Down mode at 3 speeds**

**Steering automatic deceleration**

**Mini counter-balanced electric stacker**

Type	Lift height (mm)	Mast type	Outside width between legs (mm)	Inside width between legs (mm)
CDD06-970	1400/2000/2500/3000/3300	Standard 2-STAGE	200-660	0-460

Feature		
Model		CDD06
Configuration No.		970
Type		Counterbalanced
Mast type		Standard 2-Stage
Load capacity	kg	600
Load center	mm	500
Wheel base	mm	794
Operating type		Walkie/Stand On
Wheels		
Wheels type		PU
Wheel quantity Driving wheel/Balance wheel/Bearing wheel		1/0/2
Dimension		
Standard lift height	mm	1400/2000/2500/3000/3300
Max. extend height	mm	2400/3000/3500/4000/4300
Mast lowered height	mm	1230/1580/1780/2030/2130
Lowered fork height	mm	55
Fork size(length/width/thickness)	mm	1070/100/40
Overall length	mm	2240/2660
Overall width	mm	1015
Outside width between forks	mm	200-660
Inside width between forks	mm	0-460
Min. Turning radius	mm	971/1436
Min. Aisle width for pallets 800×1200	mm	2346/2822
Min. Aisle width for pallets 1000×1200	mm	2379/2844
Min. ground clearance	mm	80
Performance		
Travel speed, laden/unladen	km/h	5/5.5
Lift speed, laden/unladen	mm/s	130/230
Lowering speed, laden/unladen	mm/s	130/230
Gradeability, laden/unladen	%	5/7
Electrical configuration		
Drive motor/Lift motor/Steering motor	kW	AC1.5/DC3/DC0.15
Battery voltage	V	24
Battery capacity	Ah	270
Brake		Electromagnetic/Regenerative
Controller		CURTIS
Weight		
Battery weight	kg	245
Service weight with battery	kg	1770

\* Details of specifications and equipment are based on information available at time of printing and may change without notice.



**ANHUI HELI INDUSTRIAL VEHICLE IMP. AND EXP. CO., LTD.**

ADD: 668 FANGXING ROAD, HEFEI, ANHUI, CHINA  
TEL: +8655163639068  
FAX: +8655163639966  
Email: heli@helichina.net  
WEBSITE: WWW.HELICHINA.COM / WWW.HELICHINA.NET




# CDD12/16

## 1.2-1.6 Ton Counterbalanced Electric Stacker

Lifting Height: 1400-4500mm

### Load Curve

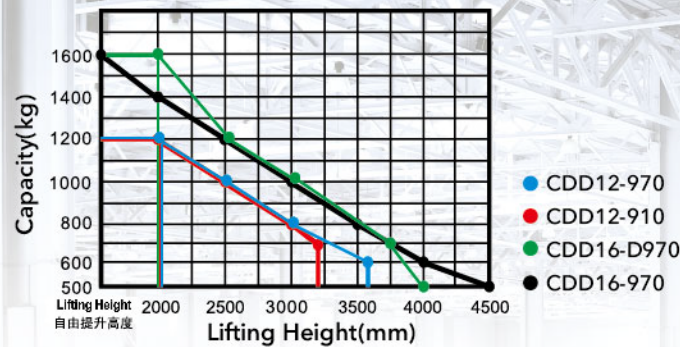

## Advantages

### Configuration and Performance

- Electronic power steering system, light and low noise.
- Two-way magnetic valve, three drop speed mode.
- AC Driving system, No carbon brush, maintenance free.
- USA CURTIS driving controller.
- Electromagnetic, regenerative braking system.
- Automatic lifting limit, proximity switch, long life.

### Safety

- Curve automatic deceleration devices, more safe.
- Vehicle decelerates automatically at higher position.
- Stepless speed control system, safe and quiet.
- Controller with Multiple automatic protection.
- Emergency reversing device/Emergency brake switch.
- High position automatic reduction device.



**AC | EPS**

**Free-maintained battery**

**Options fork tilt device**

**Counter-balanced electric stacker**

Type	Lift height (mm)	Mast type	Option
CDD12-970	1400/2000/2500/3000/3300/3600	Standard 2-STAGE	TILTING DEVICE
CDD12-910	2500/3000/3300	FULL FREE 2-STAGE	-
CDD16-D970	1400/2000/2500/3000/3300/3600/4000	Standard 2-STAGE	TILTING DEVICE
CDD16-970	3700/3900/4200/4500	FULL FREE 3-STAGE	TILTING DEVICE

Feature					
Model		CDD12	CDD12	CDD16	CDD16
Configuration No.		970	910	D970	970
Type		Counterbalanced			
Mast type		Standard 2-Stage	Full free 2-Stage	Standard 2-Stage	Full free 3-Stage
Load capacity	kg	1200	1200	1600	1600
Load center	mm	500	500	500	500
Wheel base	mm	1179	1179	1529	1529
Operating type		Walkie/Stand On			
Wheels					
Wheels type		PU	PU	PU	PU
Wheel quantity Driving wheel/ Balance wheel/Bearing wheel		1/0/2	1/0/2	1/0/2	1/0/2
Dimension					
Standard lift height	mm	1400/2000/2500/ 3000/3300/3600	2500/3000/3300	1400/2000/2500/3000/ 3300/3600/4000	3700/3900/4200/4500
Lowered fork height	mm	55	55	55	55
Fork size(length/width/thickness)	mm	1070/100/40	1070/100/40	1070/100/40	1070/100/40
Overall length	mm	2502/3012	2502/3012	2942/3362	2942/3362
Overall width	mm	1015	1015	1015	1015
Max.extend height	mm	2400/3000/3500/ 4000/4300/4600	3100/3600/3900	2400/3000/3500/4000/ 4300/4600/5000	4350/4550/4650/5150
Mast lowered height	mm	1230/1580/1780/ 2030/2130/2300	1830/2080/2180	1230/1580/1780/2030/ 2130/2330/2545	1817/1917/2002/2102
Min.Turning radius	mm	1352/1852	1352/1852	1808/2200	1808/2200
Min.Aisle width for pallets 800×1200	mm	2685/3175	2685/3175	3140/3520	3140/3520
Min.Aisle width for pallets 1000×1200	mm	2715/3195	2715/3195	3160/3538	3160/3538
Min.ground clearance	mm	80	80	80	80
Performance					
Travel speed,laden/unladen	km/h	5/5	5/5	5/5	5/5
Lift speed,laden/unladen	mm/s	130/230	130/230	130/230	130/230
Lowering speed,laden/unladen	mm/s	130/230	130/230	130/230	130/230
Gradeability,laden/unladen	%	5/7	5/7	5/7	5/7
Electrical configuration					
Drive motor/Lift motor/Steering motor	kW	AC1.5/DC3/DC0.15	AC1.5/DC3/DC0.15	AC1.5/DC3/DC0.15	AC1.5/DC3/DC0.15
Battery voltage	V	24	24	24	24
Battery capacity	Ah	270	270	270	270
Brake		Electromagnetic/Regenerative			
Controller		CURTIS			
Weight					
Battery weight	kg	245	245	245	245
Service weight with battery	kg	1800	1930	2060	2100

\* Details of specifications and equipment are based on information available at time of printing and may change without notice.



**ANHUI HELI INDUSTRIAL VEHICLE IMP. AND EXP. CO., LTD.**

ADD: 668 FANGXING ROAD, HEFEI, ANHUI, CHINA  
TEL: +8655163639068  
FAX: +8655163639966  
Email: heli@helichina.net  
WEBSITE: WWW.HELICHINA.COM / WWW.HELICHINA.NET